



K系列流量控制阀 K Series Proportional Flow Control Valve



订购码
Ordering code



气动元件
Pneumatic
element



表示节流
Indicating
throttling



表示单向
Indicating
one-way




连接型式
接管式
Connecting type
Pipe fitting type



公称通径
Nominal diameter


符号
Symbol



规格
Specifications

参数 Parameter	订购码 Ordering code									
	KLA-L6	KLA-L8	KLA-L10	KLA-L15	KLA-L20	KLA-L25	KLA-L32	KLA-L40	KLA-L50	
公称通径 mm Nominal diameter	6	8	10	15	20	25	32	40	50	
介质温度 °C Fluid temperature	-5~50									
环境温度 °C Ambient temperature	-10~55									
有效截面积 mm ² Net sectional area	5	10	20	40	60	110	190	300		
	10	20	40	60	110	190	300	400	650	
开关能力 (MPa) Open-close power	≤0.03		≤0.02			≤0.01				
	≤0.0015		≤0.01			≤0.008				
泄漏量 cm ³ /min Leakage rate	≤50		≤100			≤250		≤500		
寿命 千次 / Thousands Life	≥2000		≥1500				≥500			

尺寸
Dimensions

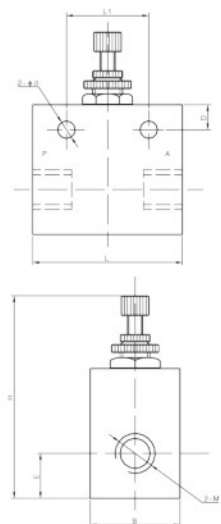

型号 Model	L	L1	H	B	连接螺纹 M Nipple joint M	E	D	d
KLA-L6	40	32	61~70	20	M10×1 (G1/8')	15	4	4.2
KLA-L8	40	32	61~70	20	M12×1.25 (G1/4')			
KLA-L10	50	37	79~88	25	M16×1.5 (G3/8')	19.5	6	5
KLA-L15	60	45	88~102	28	M20×1.5 (G3/8')	25	7.5	7.2
KLA-L20	120	60	127~139	58	M27×2 (G3/4')			
KLA-L25	120	60	127~139	58	M33×2 (G1')	29	9	7
KLA-L32	160	82	207~225	78	M42×2 (G1 1/4')	-	-	-
KLA-L40	160	82	206~224	78	M48×2 (G1 1/2')	-	-	-
KLA-L50	168	90	240~222	95	M60×2 (G2')	-	-	-

